

# SJ6826/32 RT

## ROUGH TERRAIN SCISSORS



### STANDARD FEATURES

- Drivable at full height
- Relay based control system
- Overload sensing system
- Standard Skyjack colour coded and numbered wiring
- Shroud style, impact resistant composite control box with extended cable
- Proportional controls for drive and lift functions
- Tilt alarm (4.5° x 2.5°) with drive and lift cut-out
- Lift up side doors for easy access
- Stage V Kubota D902 24.8 HP (18.5 KW)
- 90° Swing out engine tray
- Crossover symmetrical 4WD
- Foam-filled grip lug tyres
- Up to 45% Gradeability
- Multiple SAHR holding brakes
- 1.52 m Roll out extension deck
- Fold down hinged railings
- Full height spring hinged entry gate
- Lanyard attachment points
- Wiring for AC outlet at platform
- Forklift pockets and tie down / lift lugs
- Emergency lowering system
- Arm guard with slow close descend
- Independent / automatic levelling outriggers
- Flashing light
- Operator horn
- Telematics ready

### OPTIONS

- Heavy duty pipe rack
- Tool caddy
- All motion audible alarm
- 2kW Hydraulic generator
- ECOSTART (anti-engine idle)
- Diesel scrubber
- Foam-filled grip lug non-marking tyres
- Bio oil
- Secondary Guarding Lift Enable (SGLE)
- ELEVATE telematics

† Standard lead times may be increased when optional equipment is added, consult factory.  
‡ Capacities and machine weights may differ when options are added.


CE

ENG 03/2024

**SKYJACK**  
simply reliable™

# SJ6826/32 RT ROUGH TERRAIN SCISSORS

Dimensions	SJ6826 RT	SJ6832 RT
<b>A</b> Work Height	9.92 m	11.75 m
<b>B</b> Raised Platform Height	7.92 m	9.75 m
<b>C</b> Lowered Platform Height	1.23 m	1.37 m
<b>D</b> Overall Width	1.76 m	1.76 m
<b>E</b> Overall Length	3.35 m	3.35 m
<b>F</b> Stowed Height (Rails Up)	2.37 m	2.51 m
<b>G</b> Stowed Height (Rails Down)	1.61 m	1.75 m
<b>H</b> Platform Width (Inside Dimension)	1.42 m	1.42 m
<b>I</b> Platform Length (Inside Dimension)	2.44 m	2.44 m
<b>J</b> Platform Length (Deck Extended)	4.11 m	4.11 m
Specifications	SJ6826 RT	SJ6832 RT
Extension Deck	1.52 m	1.52 m
Ground Clearance	0.20 m	0.20 m
Wheelbase	2.04 m	2.04 m
Weight	3,500 kg	3,685 kg
Gradeability	45%	40%
Turning Radius (Inside)	1.52 m	1.52 m
Turning Radius (Outside)	3.96 m	3.96 m
Lift Time (With Rated Load)	36 sec	39 sec
Lower time (With Rated Load)	36 sec	36 sec
Drive Speed (Stowed)	6.1 km/h	6.1 km/h
Drive Speed (Raised)	0.6 km/h	0.6 km/h
Maximum Drive Height	Full Height	Full Height
Capacity (Overall)	567 kg	454 kg
Distributed Capacity (Main Platform)	431 kg	318 kg
Distributed Capacity (Extension Deck)	136 kg	136 kg
Local Floor Load (With Rated Load)	1,310 kN/m <sup>2</sup>	1,500 kN/m <sup>2</sup>
Overall Floor Load (With Rated Load)	830 kg/m <sup>2</sup>	890 kg/m <sup>2</sup>
Maximum # of persons up to 12.5 m/s wind rating	4	4
Diesel Engine	Kubota D902 24.8 HP (18.5 KW)	Kubota D902 24.8 HP (18.5 KW)
Fuel Tank	87 L	87 L
Hydraulic Reservoir	87 L	87 L
Outrigger Leveling (Front to Back/Side to Side)	5° / 8°	5° / 8°
Tyre Type	Foam-Filled	Foam-Filled
Tyre Size	26 x 12	26 x 12

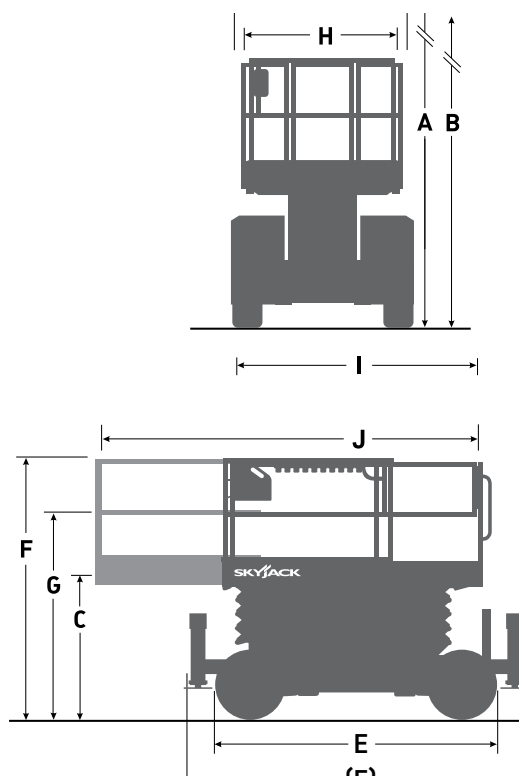

[www.skyjack.com](http://www.skyjack.com)

Skyjack UK  
Unit 1, Maes-y-Clawdd  
Maesbury Road Industrial Estate  
Oswestry, Shropshire, SY10 8NN  
Tel: +44 1691 676235  
Fax: +44 1691 676239  
Email: info@skyjackeurope.co.uk

Skyjack SAS (France)  
74 Rue Sibert  
F-42400 Saint Chamond  
France  
Tel: +33 (0) 4 78 73 53 32  
Fax: +33 (0) 4 78 56 52 42

Skyjack Hebebühnen GmbH  
(Germany)  
Därmanbusch 2a  
D-58456 Witten  
Tel: +49 (0) 2302 20 26 909  
Fax: +49 (0) 2302 20 25 671

Skyjack AB (Sweden)  
Agnesbergsvägen 28  
424 38 Agnesberg  
Sweden  
Tel: +46 (0) 31 21 22 45  
Fax: +46 (0) 31 787 65 10

**SKYJACK**  
simply reliable